

## Flex System Door & I/O Module

Part number: FS-DC01


Basic  Enterprise

The Door & I/O Module is used for controlling a door strike. In addition, it offers input and output lines compatible with indicators, alarms, door sensors, request-to-exit devices, and compatible Wiegand input devices.



### Specifications

<b>Physical</b>	Aluminum plate
<b>Operating Temperatures</b>	14° to 140° F, -10° to 60° C
<b>Humidity</b>	0 to 90% non-condensing
<b>Dimensions</b>	5" L x 1.375" W x 1" H (127 mm x 35 mm x 25.3 mm)
<b>Weight</b>	2.1 oz (59.5 g)
<b>Power</b>	Via RS485, CAT 5 patch cable from a Flex System Hub
<b>Relay Rating</b>	30 VDC@3A Max
<b>Connections</b>	RJ45

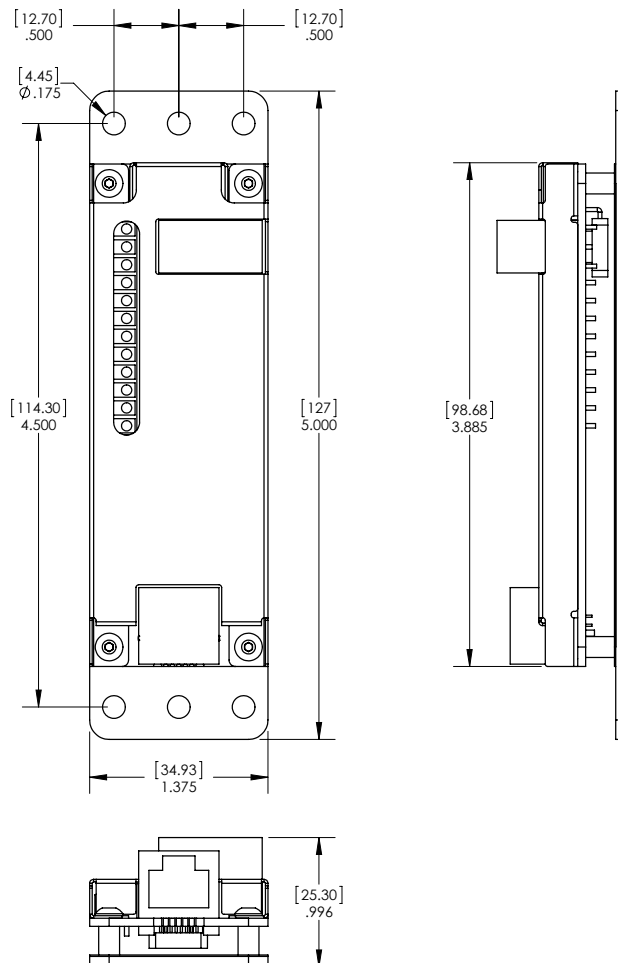

Notes:  
 Dimensions in inches (mm)  
 Drawing not to scale  
 Ø indicates diameter