

Flex System Door & I/O Module

Part Number: FS-DC01




CAW	Version 7.2 or newer
Enterprise	<input checked="" type="checkbox"/>
Basic	<input checked="" type="checkbox"/>

The Door & I/O module is used for controlling a door strike. In addition, it offers input and output lines compatible with indicators, alarms, door sensors, request-to-exit devices, and compatible Wiegand input devices.

Specifications

Physical	Aluminum plate
Operating Temperature	14° to 140° F (-10° to 60° C)
Weight	2.1 oz (59.5 g)
Dimensions	5.0" L x 1.375" W x 1.0" H (127 mm x 35 mm x 25.3 mm)
Power	Via RS485, CAT 5 patch cable from a Flex System Hub
Humidity	0 to 90% non-condensing
Relay Rating	30V DC @ 3A max
Connection	RJ45

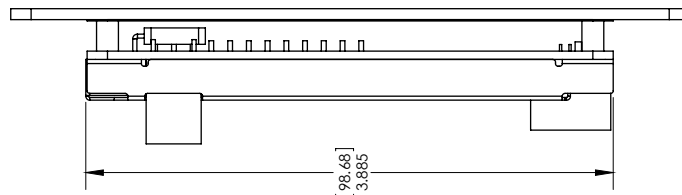

Notes:
 Dimensions in inches (mm)
 Drawing not to scale
 Ø indicates diameter

