

WebStation 2

Part Number: CKSR-040D, CKSR-040W, CKSR-F40D, CKSR-F40W




CAW	Version 9.7 or newer
Enterprise	<input checked="" type="checkbox"/>
Basic	<input checked="" type="checkbox"/>

WebStation 2 is designed to communicate with and charge issued CyberKeys. It includes both a power adapter and a USB-A to USB-B host cable for easy connection to a PC. After unit configuration via CyberLink 2 or CyberAudit Link, WebStation 2 can be connected via Ethernet cable to a network or the internet. The two-line display provides key programming and station status information to users. WebStation 2 is available in desktop or wall mount configurations.

Specifications

Physical	Black powder-coated aluminum case
Operating Temperature	32° to 122° F (0° to 50° C) non-condensing indoor or sheltered installations only
Weight	12.5 oz (354 g)
Dimensions	4.5" L x 3.7" W x 2.2" H (114 mm x 94 mm x 56 mm)
Power	Input 12V @ 1A, 110/220VAC, power adapter included
Communication	Ethernet via RJ45, USB type B
Compatible Keys	CK-RXD, CK-RXD2, CK-IR7, CK-X and all Generation 2 keys
Display	2x16 LCD character display
RoHS	Compliant with EU 2015/863
Network	https - TLS 1.2

Notes:
Dimensions in inches (mm)
Drawing not to scale
Ø indicates diameter

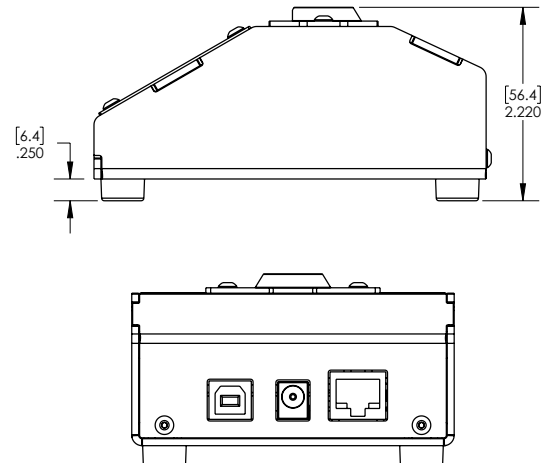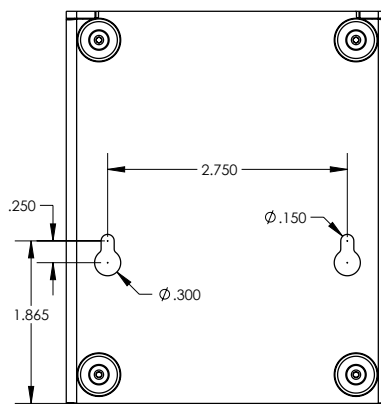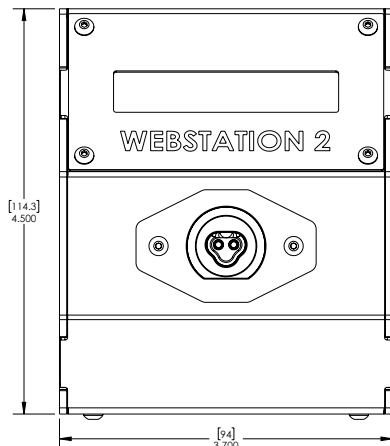

Wall Mount



CKSR-040W (110V)
CKSR-F40W (220V)

Desktop



CKSR-040D (110V)
CKSR-F40D (220V)