

CyberLock NFC European 30mm Half Profile

Part Number: NFCR-PH30




CAW	Version 9.9 or newer
Enterprise	<input checked="" type="checkbox"/>
Basic	<input type="checkbox"/>



CyberLock NFC is a keyless lock that facilitates access control using an NFC enabled device. Manufactured per Euro profile DIN 18252.

Specifications

Physical	Brass, stainless steel, and polycarbonate
Operating Temperature	-4° to 140° F (-20° to 60° C), below 14° F (-10° C) battery capacity is significantly reduced
Weight	8.43 oz (239 g)
Dimensions	1.37" Ø x 3.65" L (34.8 mm x 92.7 mm)
Communication	Infrared, NFC
Visual Output	Multicolor LED indicator light
Audio Output	Multi-tone beeper
Power	EL123 lithium battery, field replaceable
Access Options	Cyber Access app on Android or iOS, CKR-BLUE3, CK-FLASH, CK-AIR2, FK-01 IR Fob
Programming and Download Options	CyberLink 2 on PC or CyberAudit Link app via CKBR-IR10 IR Encoder 10
Software	CyberAudit® Enterprise 9.9 (or newer)
Battery Life	Up to 5 years
Audit Capacity	Up to 6,460 events
RoHS	Compliant with EU 2015/863
IP Rating	IP55

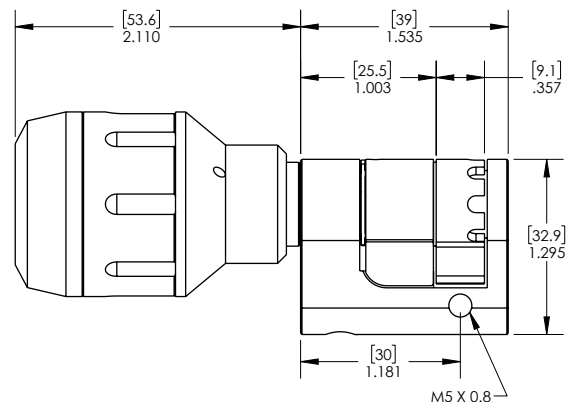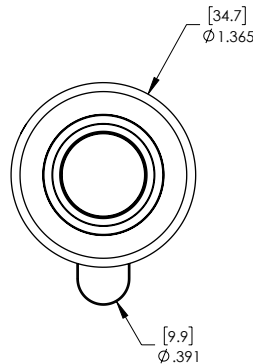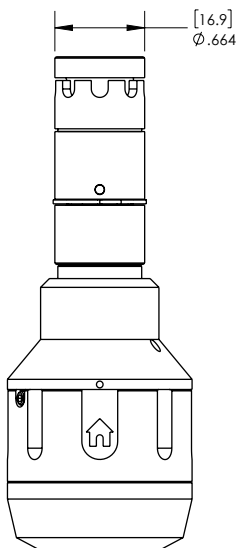

Notes:
 Dimensions in inches (mm)
 Drawing not to scale
 Ø indicates diameter